

# Homogenizer HL2.5

- Max. 2,700 Liters per Hour (140 bar)
- Max. Homogenizing pressure 700 bar (300 l/h)
- Poppet valve and Ball valve execution
- Max. motor power 15 kW
- Weight with motor approx. 1,100 kg
- Customized execution
- Optional in aseptic execution
- Designed and Made in Germany




*Technical changes reserved!*

## Poppet valves

For low viscosity and slightly abrasive Products

Model	Max. Pressure (bar)	Max. Capacity (Liters per Hour)
HL2.5-140T	140	2,700
HL2.5-180T	180	2,000
HL2.5-200T	200	1,800
HL2.5-250T	250	1,500
HL2.5-300T	300	1,200
HL2.5-350T	350	1,000
HL2.5-550T	550	600

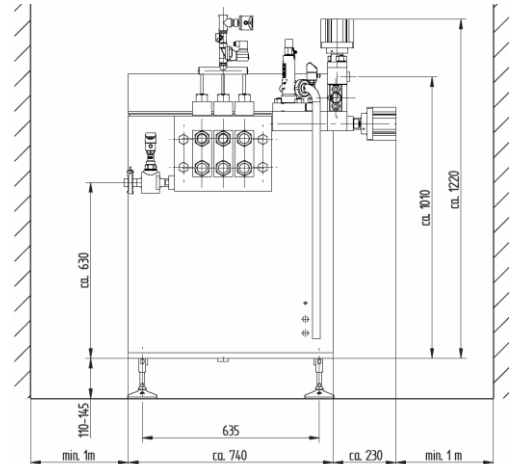

## Ball valves

For highly viscous and abrasive Products

Model	Max. Pressure (bar)	Max. Capacity (Liters per Hour)
HL2.5-150K	150	1,700
HL2.5-200K	200	1,200
HL2.5-250K	250	1,000
HL2.5-300K	300	750
HL2.5-350K	350	750
HL2.5-550K	550	400
HL2.5-700K	700	300

