

Homogenizer HL3

- Max. 12,000 Liters per Hour (140 bar)
- Max. Homogenizing pressure 700 bar (1,800 l/h)
- Poppet valve and Ball valve execution
- Max. motor power 55 kW
- Weight with motor approx. 3,000 kg
- Customized execution
- Optional with Control Cabinet incl. PLC Control and Touchpanel
- Optional in aseptic execution with sterile water unit
- Designed and Made in Germany




Technical changes reserved!

Poppet valves

For low viscosity and slightly abrasive Products


Model	Max. Pressure (bar)	Max. Capacity (Liters per Hour)
HL3-140T	140	12,000
HL3-180T	180	9,200
HL3-200T	200	8,500
HL3-250T	250	6,700
HL3-300T	300	5,500
HL3-350T	350	4,800
HL3-550T	550	3,000

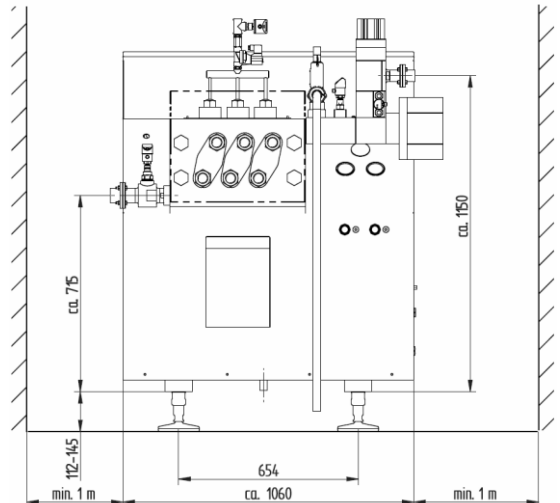

Ball valves

For highly viscous and abrasive Products

Model	Max. Pressure (bar)	Max. Capacity (Liters per Hour)
HL3-150K	150	9,500
HL3-200K	200	6,800
HL3-250K	250	5,500
HL3-300K	300	4,600
HL3-350K	350	4,300
HL3-550K	550	2,500
HL3-700K	700	1,800

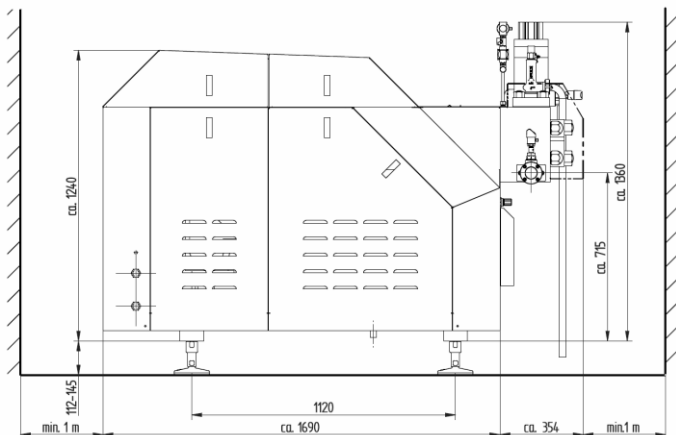

HST Maschinenbau GmbH • Werkstraße 23 • D-23942 Dassow • Germany
 Tel: +49 38826 / 88 78 0 • Email: info@hst-gmbh.com • www.hst-gmbh.com

