


# Homogenizer HST - HLE22

Standart Capacity 3.000 LT/H  
 Standard homogenization pressure 200 Bar  
 Absorbed motor power: 22 kW  
 Aseptic execution is optional  
 Suitable for processing high viscosity products  
 Unique design in accordance with the conditions of use  
 simple installation, Ergonomic Design, Easy Maintenance

Weight with Motor: Approx 1100 kg  
 Technical changes reserved!



| Model      | Max. Capacity   | Max. Pressure          |
|------------|-----------------|------------------------|
| HST-HLE22  | LT/H (Capacity) | Bar (Working Pressure) |
| HLE22-120  | 5000            | 120                    |
| HLE22-170  | 4000            | 170                    |
| HLE22-200  | 3000            | 200                    |
| HLE22-250  | 2500            | 250                    |
| HLE22-300  | 2000            | 300                    |
| HLE22-400  | 1500            | 400                    |
| HLE22-500  | 1000            | 500                    |
| HLE22-600  | 750             | 600                    |
| HLE22-750  | 500             | 750                    |
| HLE22-1000 | 300             | 1000                   |

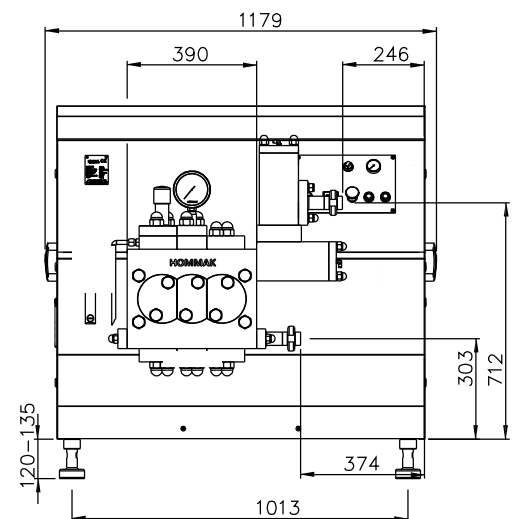

| Model      | Max. Speed  | Max. Diameter |
|------------|-------------|---------------|
| HST-HLE22  | RPM (Speed) | MM (Diameter) |
| HLE22-120  | 163         | 55            |
| HLE22-170  | 163         | 50            |
| HLE22-200  | 170         | 45            |
| HLE22-250  | 145         | 45            |
| HLE22-300  | 128         | 40            |
| HLE22-400  | 128         | 35            |
| HLE22-500  | 122         | 30            |
| HLE22-600  | 122         | 25            |
| HLE22-750  | 122         | 20            |
| HLE22-1000 | 122         | 16            |

