


Homogenizer HST - HLE30

Standart Capacity 3.500 LT/H
 Standard homogenization pressure 200 Bar
 Absorbed motor power: 30 kW
 Aseptic execution is optional
 Suitable for processing high viscosity products
 Unique design in accordance with the conditions of use
 simple installation, Ergonomic Design, Easy Maintenance

Weight with Motor: Approx 1100 kg
 Technical changes reserved!



Model	Max. Capacity	Max. Pressure
HST-HLE30	LT/H (Capacity)	Bar (Working Pressure)
HLE30-120	5500	120
HLE30-170	4250	170
HLE30-200	3500	200
HLE30-250	3000	250
HLE30-300	2250	300
HLE30-400	1650	400
HLE30-500	1200	500
HLE30-600	1000	600
HLE30-750	600	750
HLE30-1000	350	1000

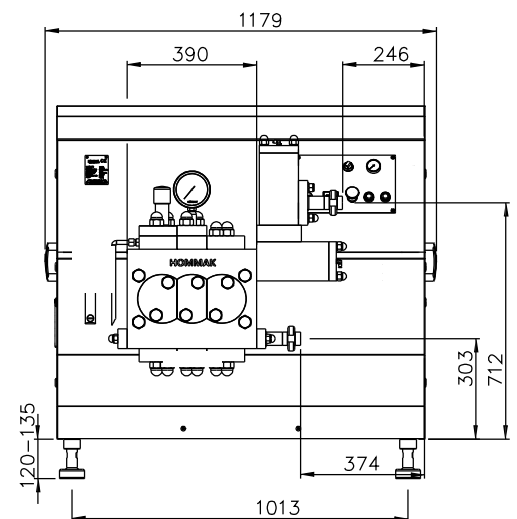

Model	Max. Speed	Max. Diameter
HST-HLE30	RPM (Speed)	MM (Diameter)
HLE30-120	163	55
HLE30-170	163	50
HLE30-200	170	45
HLE30-250	145	45
HLE30-300	128	40
HLE30-400	128	35
HLE30-500	122	30
HLE30-600	122	25
HLE30-750	122	20
HLE30-1000	122	16

