


# Homogenizer HST- HLE37

Standart Capacity 5000 LT/H  
 Standard homogenization pressure 200 Bar  
 Absorbed motor power: 37 kW  
 Aseptic execution is optional  
 Suitable for processing high viscosity products  
 Unique design in accordance with the conditions of use  
 simple installation, Ergonomic Design, Easy Maintenance

Weight with Motor: Approx 1800 kg  
 Technical changes reserved!



Model	Max. Capacity	Max. Pressure
HST-HLE37	LT/H (Capacity)	Bar (Working Pressure)
HLE37-130	7000	130
HLE37-170	6000	170
HLE37-200	5000	200
HLE37-250	4000	250
HLE37-300	3000	300
HLE37-400	2500	400
HLE37-500	1500	500
HLE37-750	1000	750
HLE37-1000	750	1000

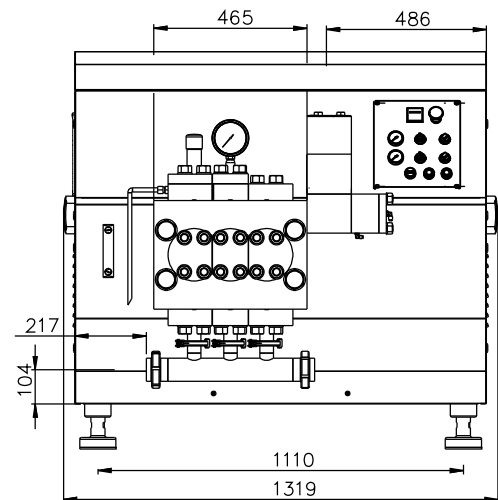

Model	Max. Speed	Max. Diameter
HST-HLE37	RPM (Speed)	MM (Diameter)
HLE37-130	123	70
HLE37-170	145	60
HLE37-200	123	60
HLE37-250	116	55
HLE37-300	123	50
HLE37-400	129	45
HLE37-500	123	35
HLE37-750	123	30
HLE37-1000	123	20

