


Homogenizer HST- HLE45

Standart Capacity 6.000 LT/H
 Standard homogenization pressure 200 Bar
 Absorbed motor power: 45 kW
 Aseptic execution is optional
 Suitable for processing high viscosity products
 Unique design in accordance with the conditions of use
 simple installation, Ergonomic Design, Easy Maintenance

Weight with Motor: Approx 1800 kg
 Technical changes reserved!



Model	Max. Capacity	Max. Pressure
HST-HLE45	LT/H (Capacity)	Bar (Working Pressure)
HLE45-130	7250	130
HLE45-170	6550	170
HLE45-200	6000	200
HLE45-250	5000	250
HLE45-300	3500	300
HLE45-400	2750	400
HLE45-500	1750	500
HLE45-750	1250	750
HLE45-1000	850	1000

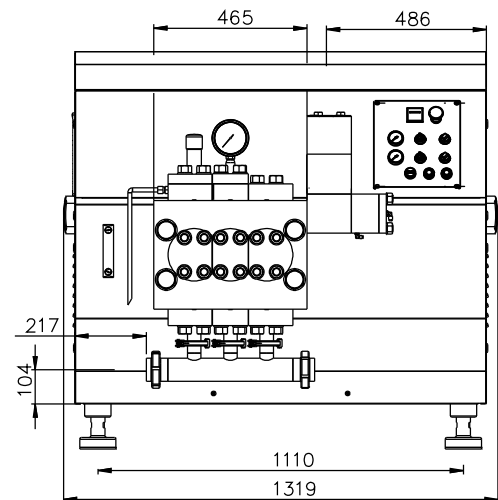

Model	Max. Speed	Max. Diameter
HST-HLE45	RPM (Speed)	MM (Diameter)
HLE45-130	123	70
HLE45-170	145	60
HLE45-200	123	60
HLE45-250	116	55
HLE45-300	123	50
HLE45-400	129	45
HLE45-500	123	35
HLE45-750	123	30
HLE45-1000	123	20

