

Homogenizer HLI45

- Max. 11,700 Liters per Hour (100 bar)
- Max. Homogenizing pressure 700 bar (1,500 l/h)
- Poppet valve and Ball valve execution
- Max. motor power 45 kW
- Weight with motor approx. 1,500 kg
- Customized execution
- Control Cabinet incl. PLC Control
- Optional in aseptic execution with sterile water unit
- Integrated lubrication system
- Lower ecological footprint
- Designed and Made in Germany




Technical changes reserved!

Poppet valves

For low viscosity and slightly abrasive Products


Model	Max. Pressure (bar)	Max. Capacity (Liters per Hour)
HLI45-100T	100	11,700
HLI45-150T	150	8,700
HLI45-200T	200	6,300
HLI45-250T	250	5,100
HLI45-300T	300	4,200
HLI45-350T	350	3,300
HLI45-550T	550	2,100

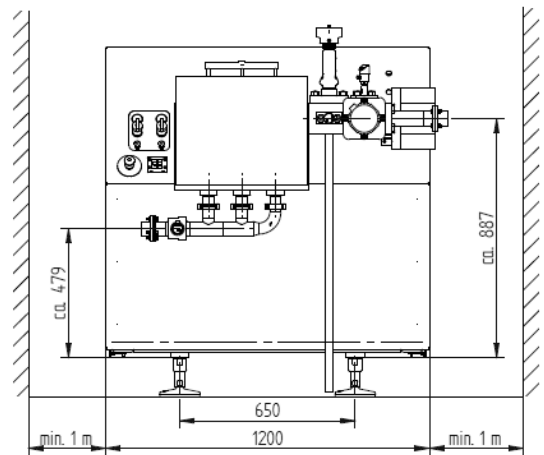

Ball valves

For highly viscous and abrasive Products

Model	Max. Pressure (bar)	Max. Capacity (Liters per Hour)
HLI45-150K	150	7,200
HLI45-200K	200	5,200
HLI45-300K	300	3,500
HLI45-400K	400	2,500
HLI45-550K	550	1,750
HLI45-700K	700	1,500

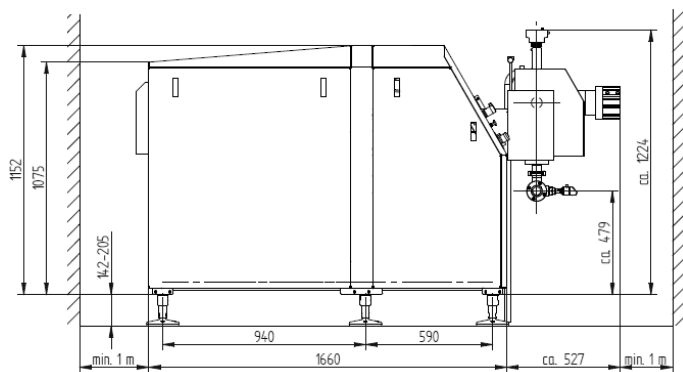

HST Maschinenbau GmbH • Werkstraße 23 • D-23942 Dassow • Germany
Tel: +49 38826 / 88 78 0 • E-Mail: info@hst-gmbh.com • www.hst-gmbh.com